



Smoke Detector



DATA SHEET

+44 20 8895 6455
info@webbinfra.com
www.webbinfra.com



Environmental Monitoring

Webb environmental monitoring products permit you to actively monitor the conditions in BTS stations, warehouses, datacenters, colleges /educational institutes, hospitals, offices, restaurants, farmsteads, factories, museums or wherever it is essential to have a climate controlled environment. Upholding a constant & steady environment where equipment or products are housed is critical for operation, protection and usage in various industries. Conditions monitoring consist of temperature, humidity, power spikes and surges, liquid leakage, SNMP traps from other devices along with smoke & airflow.

Webb environmental monitoring equipment allows network machinists to detect conditions from a secure web interface and obtain SNMP, E-mails, and text message or siren/alert warnings when environmental sensors detect a breach in the preset thresholds. These products can also make you cognizant of the potential damages from critical failures. The Web interface can demonstrate live video surveillance and environmental magnitudes, which are logged to track patterns.

SMOKE / FIRE


T.10.560 / Smoke detector

Smoke detectors are ideal to spot the preliminary signs of component fires in data cabinets. The best approach here is to wire the smoke alarms directly into webb environmental monitoring system, basically covering the functionality of the environmental sensors to the smoke alarm.

Product Specifications

- Sensor is desirable for detecting smoke indoors
- Daisy chain sensor with 150 meters maximum distance from the monitoring unit

**Specifications are subject to change without notice based on technical recommendations and related product enhancements*

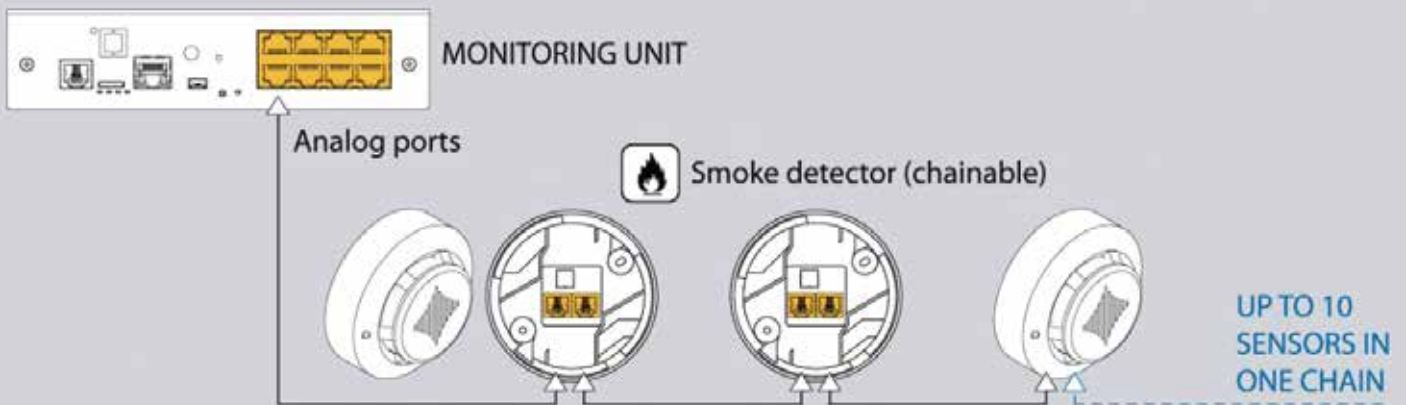

**Specifications are subject to change without notice based on technical recommendations and related product enhancements*

Technical Specifications

Dimensions	Ø100×45 mm
Weight	290 g
Inputs	2 x RJ-12
Operating characteristics	Temperature: minimum. -10° C - maximum.80° C, humidity: minimum. 5% - maximum. 95% (non-condensing)
Mounting	Mounting bracket included
Power consumption	100 mW
Status indicators	Error LED
Components	Manufactured in E.U
Maximum distance	150 m
HS code	8531 10 950
Special features	Daisy chain, sensitivity 0,05 — 0,2 db/m

**Specifications are subject to change without notice based on technical recommendations and related product enhancements*