



Fibre Optic Splice Closure



DATA SHEET

+44 20 8895 6455
info@webbinfra.com
www.webbinfra.com

Fibre Optic Splice Closure C.05.JC-D.220.48SC

Joint closures are a range of products primarily used for joining cables. Joints in cables are a practical reality with the increase in distances that data needs to be transmitted. The primary function of a fiber optic joint closure is to protect the fiber joints from any physical damage.

Webb joint closures are made of high corrosion resistant polycarbonate material with heavy duty IP 68 delivering synthetic gaskets for total ingress protection. Our production treatments make our units UV resistant and waterproof. Every cable entry has high quality cable sealing plugs to maintain IP 68 ratings.


Features

- Suitable for 48 SC single structure adaptors
- Maximum for 48 drop cables
- Can hold 1 x 2, 1 x 4, 1 x 8, 1 x 16, 1 x 32 categories of PLC splitter
- Can be utilized for notched, closed & rigid sheath platforms
- Suitable for the entire range of fibre optic cables
- Inclusive of sheath conservation and central strength member fasten feature
- Corrugated closure and light-weight plastic delivers robustness and resistance to chemical and UV degradation.
- Requires only base level usage of tools during installation & re-entry
- Inclusive of the entire range of hardware & flash test option is available for closures
- Protection category: IP68
- RoHS compliance

Specifications

Part number	Splice tray	Spliced fibre storage capacity	Size(mm) height x diameter	Cable ports
C.05.JC-D.220A.48SC	Tray 204A capacity:24F	72 splices (3 x 24 splices)	488mm x 285mm	1 oval port:for 1 looped cable with max dia. 30mm. 6 round ports: each port for 8 drop cable with max dia. 6mm.
C.05.JC-D.220B.48SC	Tray 204B capacity:24F	96 splices (4 x 24 splices)		
C.05.JC-D.220C.48SC	Tray 204C capacity:24F	96 splices (4 x 24 splices)		

**Specifications are subject to change without notice based on technical recommendations and related product enhancements*

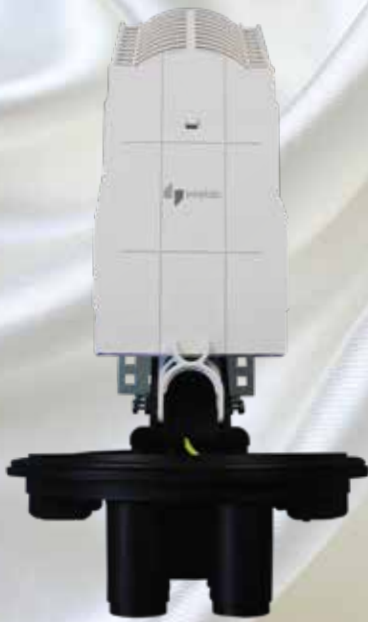

C.05.JC-D.220A.48SC



C.05.JC-D.220B.48SC



C.05.JC-D.220C.48SC



Tray with PLC splitter



Drop cable sealing

**Specifications are subject to change without notice based on technical recommendations and related product enhancements*

Applications

- Underground
- Pole mounting
- Aerial
- Wall mounting
- Vault

Heat Shrink Sealing Kits For Oval Port



- Oval port closing kits
- Up to 2 looped cables
- Maximum diameter of cables \varnothing 30 mm

Drop Cable Sealing Kits For Round Port



- Round port closing kit BC6-002-M8-6mm
- Up to 2 looped cables
- Up to 8 drop cables
- Maximum diameter of cables \varnothing 6 mm

**Specifications are subject to change without notice based on technical recommendations and related product enhancements*



Optional Accessories

Type	Code
Earthing wire	C.05.OA.JC-EW
Hoop for pole mount	C.05.OA.JC-H
Transom for pole mount	C.05.OA.JC-T
Bracket option for wall mount	C.05.OA.JC-B
Sand paper	C.05.OA.JC-SP
Anchor bolts	C.05.OA.JC-AB

**Specifications are subject to change without notice based on technical recommendations and related product enhancements*