




# Fibre Optic Splice Closure

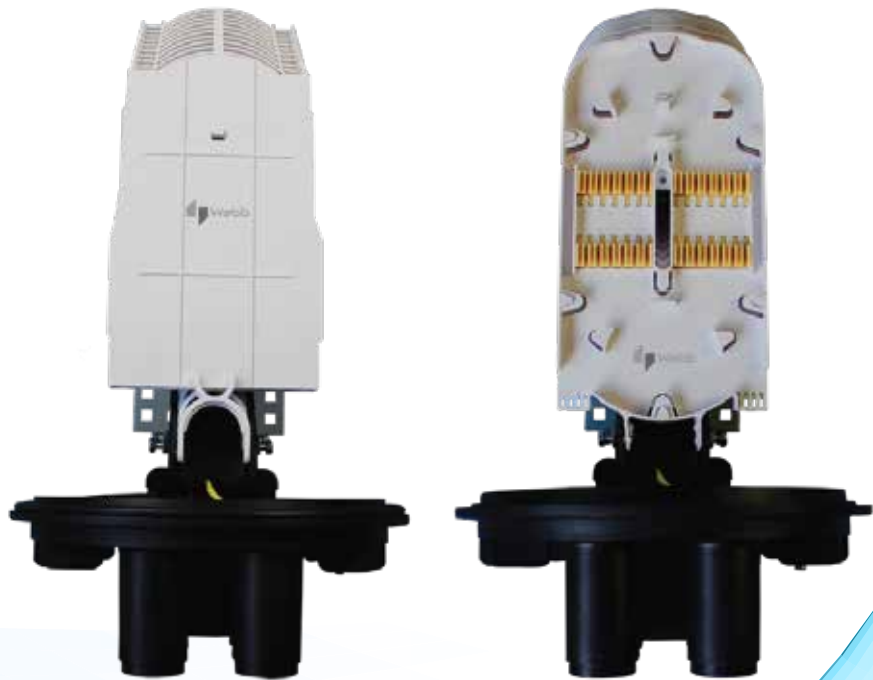

# DATA SHEET

☎ +44 20 8895 6455  
✉ [info@webbinfra.com](mailto:info@webbinfra.com)  
🌐 [www.webbinfra.com](http://www.webbinfra.com)

# Fibre Optic Splice Closure C.05.JC-D.220.BC6

Joint closures are a range of products primarily used for joining cables. Joints in cables are a practical reality with the increase in distances that data needs to be transmitted. The primary function of a fiber optic joint closure is to protect the fiber joints from any physical damage.


Webb joint closures are made of high corrosion resistant polycarbonate material with heavy duty IP 68 delivering synthetic gaskets for total ingress protection. Our production treatments make our units UV resistant and waterproof. Every cable entry has high quality cable sealing plugs to maintain IP 68 ratings.

## Features

- Can be utilized for notched, closed and rigid sheath platforms
- Suitable for the entire range of fibre optic cables
- Inclusive of sheath conservation and central strength member fasten feature
- Corrugated closure and light-weight plastic delivers robustness and resistance to chemical and UV degradation
- Requires only base level usage of tools during installation and re-entry
- Inclusive of the entire range of hardware & flash test option is available for closures
- Protection category: IP68
- RoHS compliance

Part number	Description
C.05.JC-D.220A.BC6	Fibre optic closure with the 204A tray (capacity 288 splices) dimensions 488 mm x 285 mm with 1 oval port for 1 cable with max 30mm. and 6 round ports , each port for 1 cable with max 30 mm
C.05.JC-D.220B.BC6	Fibre optic closure with the 204B tray (capacity 288 splices) dimensions 488 mm x 285 mm with 1 oval port for 1 cable with max 30mm. and 6 round ports , each port for 1 cable with max 30 mm
C.05.JC-D.220C.BC6	Fibre optic closure with the 204C tray (capacity 288 splices) dimensions 488 mm x 285 mm with 1 oval port for 1 cable with max 30mm. and 6 round ports , each port for 1 cable with max 30 mm
C.05.JC-D.220D.BC6	Fibre optic closure with the 102A tray (capacity 288 splices) dimensions 566 mm x 285 mm with 1 oval port for 1 cable with max 30mm and 6 round ports , each port for 1 cable with max 30 mm
C.05.JC-D.220E.BC6	Fibre optic closure with the 102B tray (capacity 288 splices) dimensions 566 mm x 285 mm with 1 oval port for 1 cable with max 30mm and 6 round ports , each port for 1 cable with max 30 mm

*\*Specifications are subject to change without notice based on technical recommendations and related product enhancements*

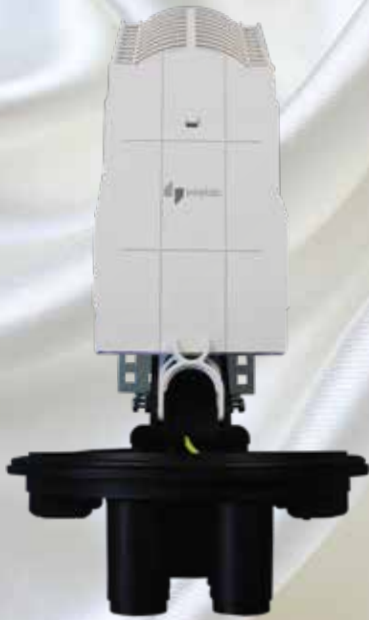


C.05.JC-D.220A.BC6



C.05.JC-D.220B.BC6



C.05.JC-D.220C.BC6

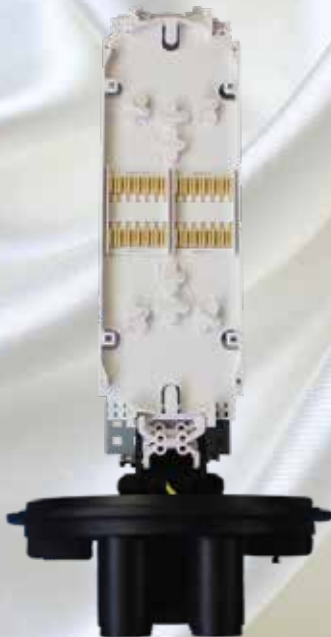

C.05.JC-D.220D.BC6



C.05.JC-D.220E.BC6



Drop cable sealing

*\*Specifications are subject to change without notice based on technical recommendations and related product enhancements*

## Applications

- Underground
- Pole mounting
- Aerial
- Wall mounting
- Vault

## Specifications

Part number	Splice tray	Spliced fibre storage capacity	Size(mm) height x diameter	Cable ports
C.05.JC-D.220A.BC6	Tray 204A capacity:24F	288F(single fusion)	488mm x 285mm	1 oval port:for 1 looped cable with max dia 30mm, 6 round ports:Each port for 1 cable with max dia 30mm oreach port for 8 drop cable with max dia 6mm
C.05.JC-D.220B.BC6	Tray 204B capacity:24F			
C.05.JC-D.220C.BC6	Tray 204C capacity:24F			
C.05.JC-D.220D.BC6	Tray 102A capacity:24F	288F(single fusion) 864F(mass fusion,ribbon)	566mm x 285mm	
C.05.JC-D.220E.BC6	Tray 102B capacity:24F	288F(single fusion)		

## Optional Accessories

Type	Code
Earthing wire	C.05.OA.JC-EW
Hoop for pole mount	C.05.OA.JC-H
Transom for pole mount	C.05.OA.JC-T
Bracket option for wall mount	C.05.OA.JC-B
Sand paper	C.05.OA.JC-SP
Anchor bolts	C.05.OA.JC-AB

*\*Specifications are subject to change without notice based on technical recommendations and related product enhancements*