

# Fibre Optic Splice Closure





**६** +44 20 8895 6455 **∞** info@webbinfra.com **⊕** www.webbinfra.com



## Fibre Optic Splice Closure C.05.JC-D.P204

Joint closures are a range of products primarily used for joining cables. Joints in cables are a practical reality with the increase in distances that data needs to be transmitted. The primary function of a fiber optic joint closure is to protect the fiber joints from any physical damage.

Webb joint closures are made of high corrosion resistant polycarbonate material with heavy duty IP 68 delivering synthetic gaskets for total ingress protection. Our production treatments make our units UV resistant and waterproof. Every cable entry has high quality cable sealing plugs to maintain IP 68 ratings.

#### **Features**

- Can be utilized for notched, closed & rigid sheath platforms
- Suitable for the entire range of fibre optic cables
- Inclusive of sheath conservation and central strength member fasten feature
- Corrugated closure and light-weight plastic delivers robustness and resistance to chemical and UV degradation.
- Requires only base level usage of tools during installation & re-entry
- Inclusive of the entire range of hardware & flash test option is available for closures
- Protection category: IP68
- RoHS compliance

#### **Applications**


- Underground
- Wall mountingPole mounting
- Aerial
- Vault

\*Specifications are subject to change without notice based on technical recommendations and related product enhancements

**\** +44 20 8895 6455 **\\$** info@webbinfra.com **\\$** www.webbinfra.com





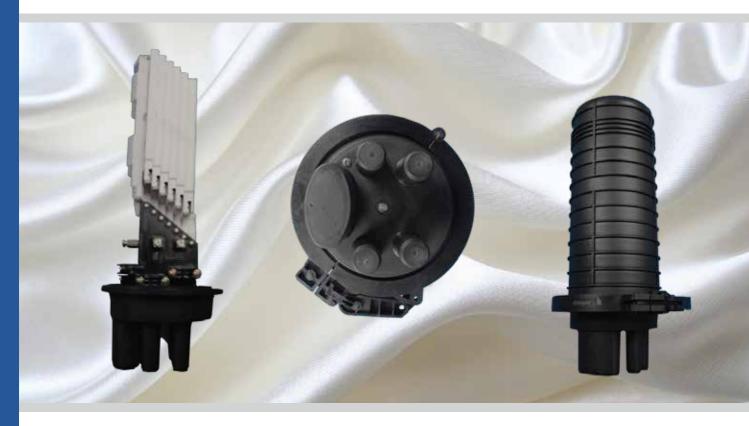

\*Specifications are subject to change without notice based on technical recommendations and related product enhancements

**६** +44 20 8895 6455 **∞** info@webbinfra.com **⊕** www.webbinfra.com



### **Specifications**

Part number	Splice tray	Spliced fibre storage capacity	Cable ports	Size(mm) height x diameter	Cable ports
C.05.JC-D.P204A	Tray 204A capacity : 24 splices	144 splices (6 x 24 splices)	1 oval port +	450mm x 230 mm	1 oval port for1 looped cable with max 22 mm. 4 round ports ,each port for 1 cable with max 17.5 mm
C.05.JC-D.P204B	Tray 204B capacity : 24 splices	168 splices (7 x 24 splices)	4 round ports		

#### **Optional Accessories**

Туре	Code	
Earthing wire	C.05.OA.JC-EW	
Hoop for pole mount	С.05.ОА.ЈС-Н	
Transom for pole mount	C.05.0A.JC-T	
Bracket option for wall mount	C.05.0A.JC-B	
Sand paper	C.05.OA.JC-SP	
Anchor bolts	C.05.OA.JC-AB	

\*Specifications are subject to change without notice based on technical recommendations and related product enhancements

**\** +44 20 8895 6455 **\\$** info@webbinfra.com **\\$** www.webbinfra.com