



Fibre Optic Splice Closure




DATA SHEET

☎ +44 20 8895 6455
✉ info@webbinfra.com
🌐 www.webbinfra.com

Fibre Optic Splice Closure C.05.JC-D.P224.16SC

Joint closures are a range of products primarily used for joining cables. Joints in cables are a practical reality with the increase in distances that data needs to be transmitted. The primary function of a fiber optic joint closure is to protect the fiber joints from any physical damage.

Webb joint closures are made of high corrosion resistant polycarbonate material with heavy duty IP 68 delivering synthetic gaskets for total ingress protection. Our production treatments make our units UV resistant and waterproof. Every cable entry has high quality cable sealing plugs to maintain IP 68 ratings.

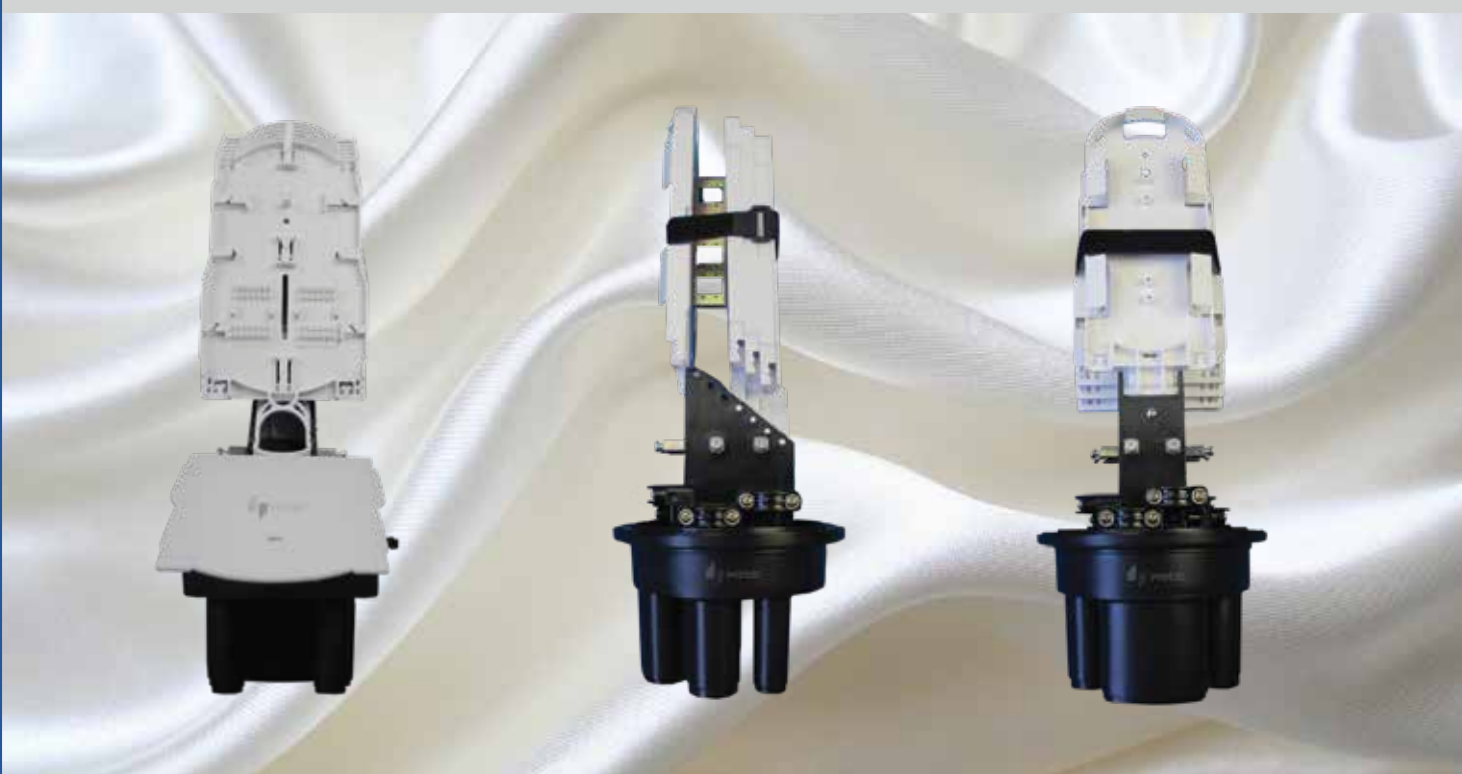

Applications

- Underground
- Aerial
- Vault
- Wall mounting
- Pole mounting

**Specifications are subject to change without notice based on technical recommendations and related product enhancements*

Features

- Suitable for 8/16SC single structure adaptors
- Maximum for 16 drop cables
- Recyclable and suitable for re-entry with mechanical seal
- Can hold 1 x 2, 1 x 4, 1 x 8 categories of PLC splitter
- Can be utilized for notched, closed & rigid sheath platforms
- Suitable for the entire range of fibre optic cables
- Inclusive of sheath conservation and central strength member fasten feature
- Corrugated closure and light-weight plastic delivers robustness and resistance to chemical and UV degradation.
- Requires only base level usage of tools during installation & re-entry
- Inclusive of the entire range of hardware & flash test option is available for closures
- RoHS compliance



**Specifications are subject to change without notice based on technical recommendations and related product enhancements*

Specifications

Part number	Splice tray	Spliced fibre storage capacity	Cable ports	Size(mm) height x diameter	Cable ports
C.05.JC-D.P224A.16SC	Tray 204A	24 splices (1 x 24 splices)	1 oval port + 4 round ports	450mm x 230 mm	1 oval port for 1 looped cable with max 22 mm 2 round ports : each port for 1 cable with max 17.5 mm
C.05.JC-D.P224B.16SC	Tray 204B	24 splices (2 x 24 splices)			2 round ports: each port for 1 cable with max 24 mm or drop cable

Drop Cable Sealing Kits For Round Port



- Round port closing kit BC6-002-M4-9mm
- Round port Ø 30 mm
- Up to 4 drop cables
- Maximum diameter of cables Ø 9 mm



- Round port closing kit BC6-002-M8-6mm
- Round port Ø 30 mm
- Up to 8 drop cables
- Maximum diameter of cables Ø 6 mm

**Specifications are subject to change without notice based on technical recommendations and related product enhancements*

Optional Accessories

Type	Code
Earthing wire	C.05.OA.JC-EW
Hoop for pole mount	C.05.OA.JC-H
Transom for pole mount	C.05.OA.JC-T
Bracket option for wall mount	C.05.OA.JC-B
Sand paper	C.05.OA.JC-SP
Anchor bolts	C.05.OA.JC-AB

**Specifications are subject to change without notice based on technical recommendations and related product enhancements*