




Fibre Optic Splice Closure

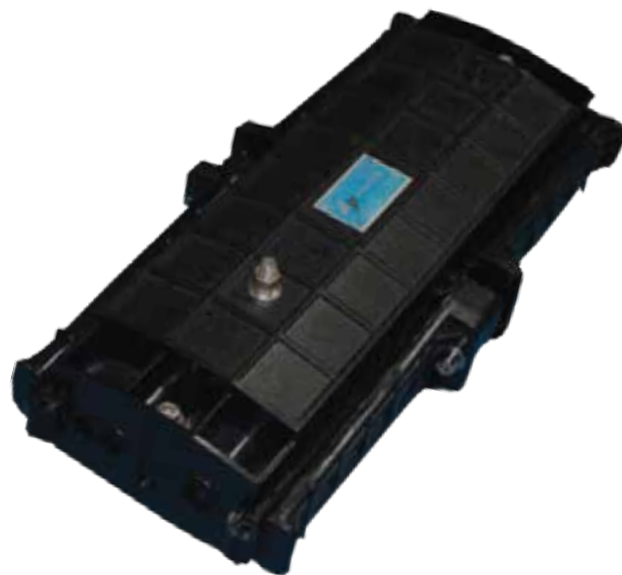


DATA SHEET

☎ +44 20 8895 6455
✉ info@webbinfra.com
🌐 www.webbinfra.com

Fibre Optic Inline Closure C.05.JC-L.102

Joint closures are a range of products primarily used for joining cables. Joints in cables are a practical reality with the increase in distances that data needs to be transmitted. The primary function of a fiber optic joint closure is to protect the fiber joints from any physical damage.

Webb joint closures are made of high corrosion resistant polycarbonate material with heavy duty IP 68 delivering synthetic gaskets for total ingress protection. Our production treatments make our units UV resistant and waterproof. Every cable entry has high quality cable sealing plugs to maintain IP 68 ratings.

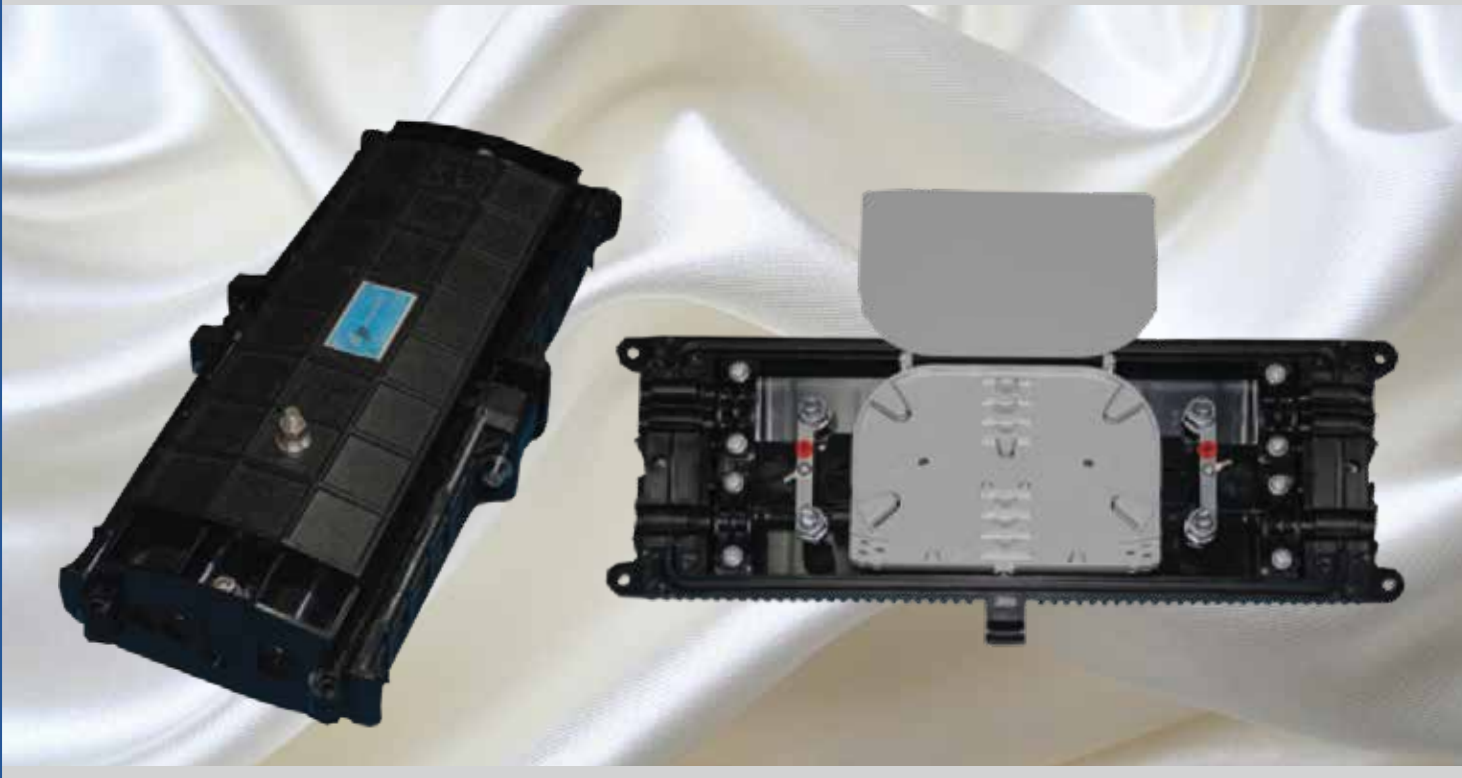

Applications

- Underground
- Aerial
- Vault
- Inspection chamber

**Specifications are subject to change without notice based on technical recommendations and related product enhancements*

Features

- Can be utilized for notched, closed & rigid sheath platforms
- Suitable for the entire range of fibre optic cables
- Corrugated closure and light-weight plastic delivers robustness and resistance to chemical and UV degradation.
- Recyclable and suitable for re-entry
- Inclusive of sheath conservation and central strength member fasten feature
- Requires only base level usage of tools during installation & re-entry
- Inclusive of the entire range of hardware
- Protection category: IP68
- RoHS compliance

Specifications

Part number	Spliced fibre storage capacity	Size(mm) L x W x H	Cable ports	Max.diameter of cable(mm)	Splice trays
C.05.JC-L.102.48	48splices (4 x 12 splices)	400mm x 185mm x 90mm	6 ports	6 ports : 2 ports ,each port for 1 cable with max 16mm. 4 ports , each port for 1 cable with max 13mm	Max.4 trays(each tray for 12 or 24 splices)
C.05.JC-L.102.96	96splices (4 x 24 splices)				

**Specifications are subject to change without notice based on technical recommendations and related product enhancements*