




# Fibre Optic Splice Closure

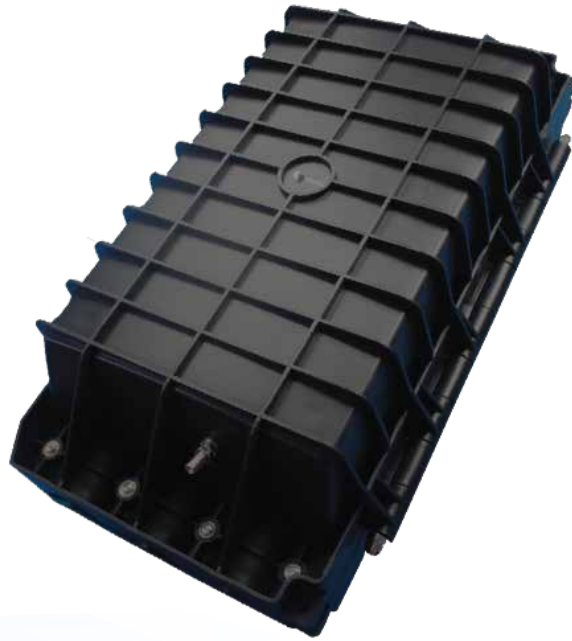


# DATA SHEET

☎ +44 20 8895 6455  
✉ [info@webbinfra.com](mailto:info@webbinfra.com)  
🌐 [www.webbinfra.com](http://www.webbinfra.com)

## Fibre Optic Inline Closure C.05.JC-L.119.48SC

Joint closures are a range of products primarily used for joining cables. Joints in cables are a practical reality with the increase in distances that data needs to be transmitted. The primary function of a fibre optic joint closure is to protect the fibre joints from any physical damage.

Webb joint closures are made of high corrosion resistant polycarbonate material with heavy duty IP 68 delivering synthetic gaskets for total ingress protection. Our production treatments make our units UV resistant and waterproof. Every cable entry has high quality cable sealing plugs to maintain IP 68 ratings.

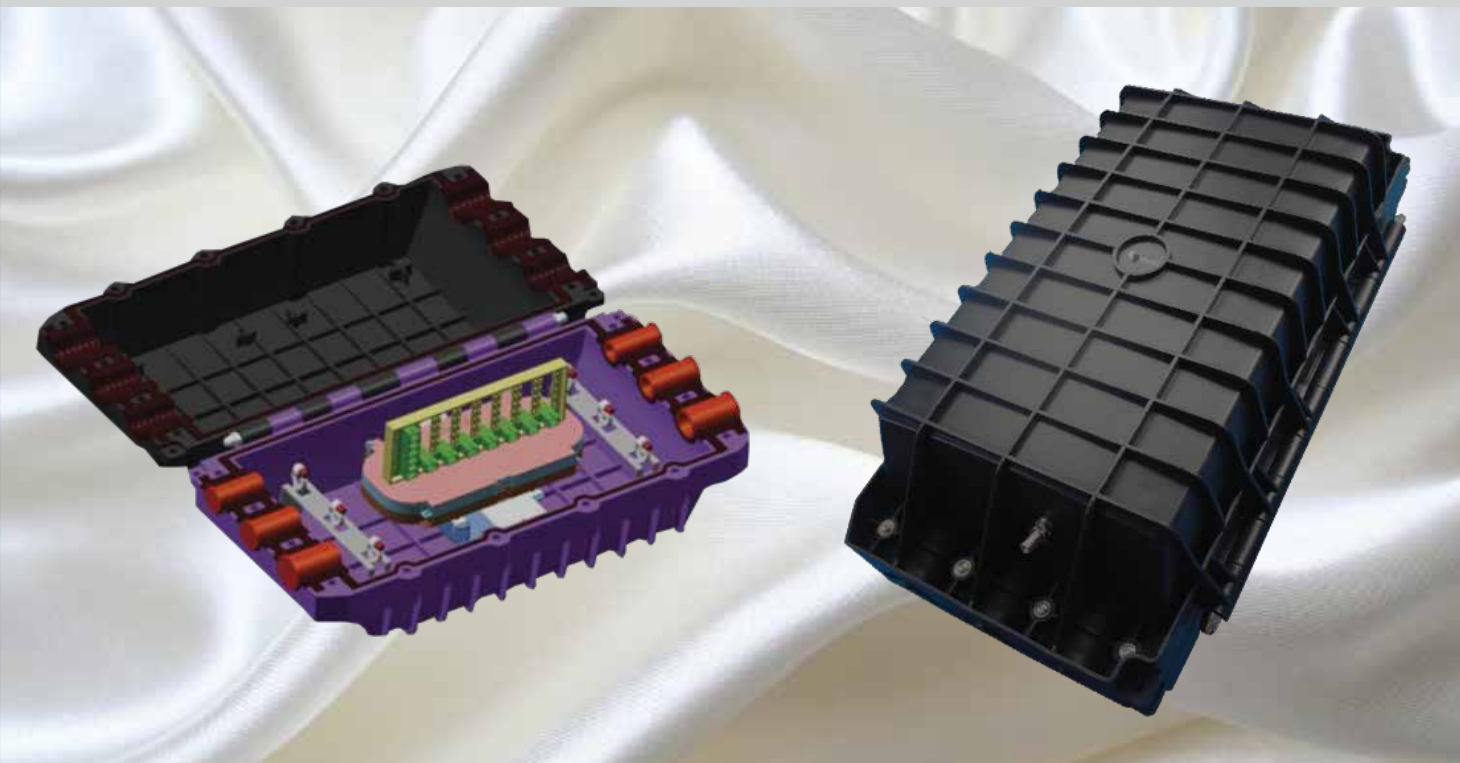

### Applications

- Duct
- Aerial
- Wall mounting

*\*Specifications are subject to change without notice based on technical recommendations and related product enhancements*

## Features

- Suitable for 48 SC single structure adaptors
- Maximum for 48 drop cables
- Can hold 1 x 32, 1 x 16, 1 x 8 categories of PLC splitter
- Recyclable and suitable for re-entry
- Can be utilized for notched, closed & rigid sheath platforms
- Suitable for the entire range of fibre optic cables
- Corrugated closure and light-weight plastic delivers robustness and resistance to chemical and UV degradation.
- Inclusive of sheath conservation and central strength member fasten feature
- Requires only base level usage of tools during installation & re-entry
- Inclusive of the entire range of hardware & flash test option is available for closures
- Protection category: IP68
- RoHS compliance

## Specifications

Part number	Size(mm) L x W x H	Spliced fibre storage capacity	Cable ports	Adaptor capacity
C.05.JC-L.119.48SC	500mm x 270mm x 194mm	Standard fibre, 48 splices (2 x 24 splices)	6 ports: 2 ports for 1 cable with max dia 22mm, 2 ports for 1 cable with max dia 25mm, 2 ports for 1 cable with max dia 30mm or 48 pcs of drop cables.	48 SC simplex adaptors

*\*Specifications are subject to change without notice based on technical recommendations and related product enhancements*