



# Fibre Optic Splice Closure



# DATA SHEET

+44 20 8895 6455  
info@webbinfra.com  
www.webbinfra.com


## Fibre Optic Inline Closure C.05.JC-L.131

Joint closures are a range of products primarily used for joining cables. Joints in cables are a practical reality with the increase in distances that data needs to be transmitted. The primary function of a fibre optic joint closure is to protect the fibre joints from any physical damage.

Webb joint closures are made of high corrosion resistant polycarbonate material with heavy duty IP 67 delivering synthetic gaskets for total ingress protection. Our production treatments make our units UV resistant and waterproof. Every cable entry has high quality cable sealing plugs to maintain IP 67 ratings.

### Features

- Suitable for the entire range of fibre optic cables
- Requires only base level usage of tools during installation & re-entry
- Recyclable and suitable for re-entry
- Inclusive of the complete range of hardware

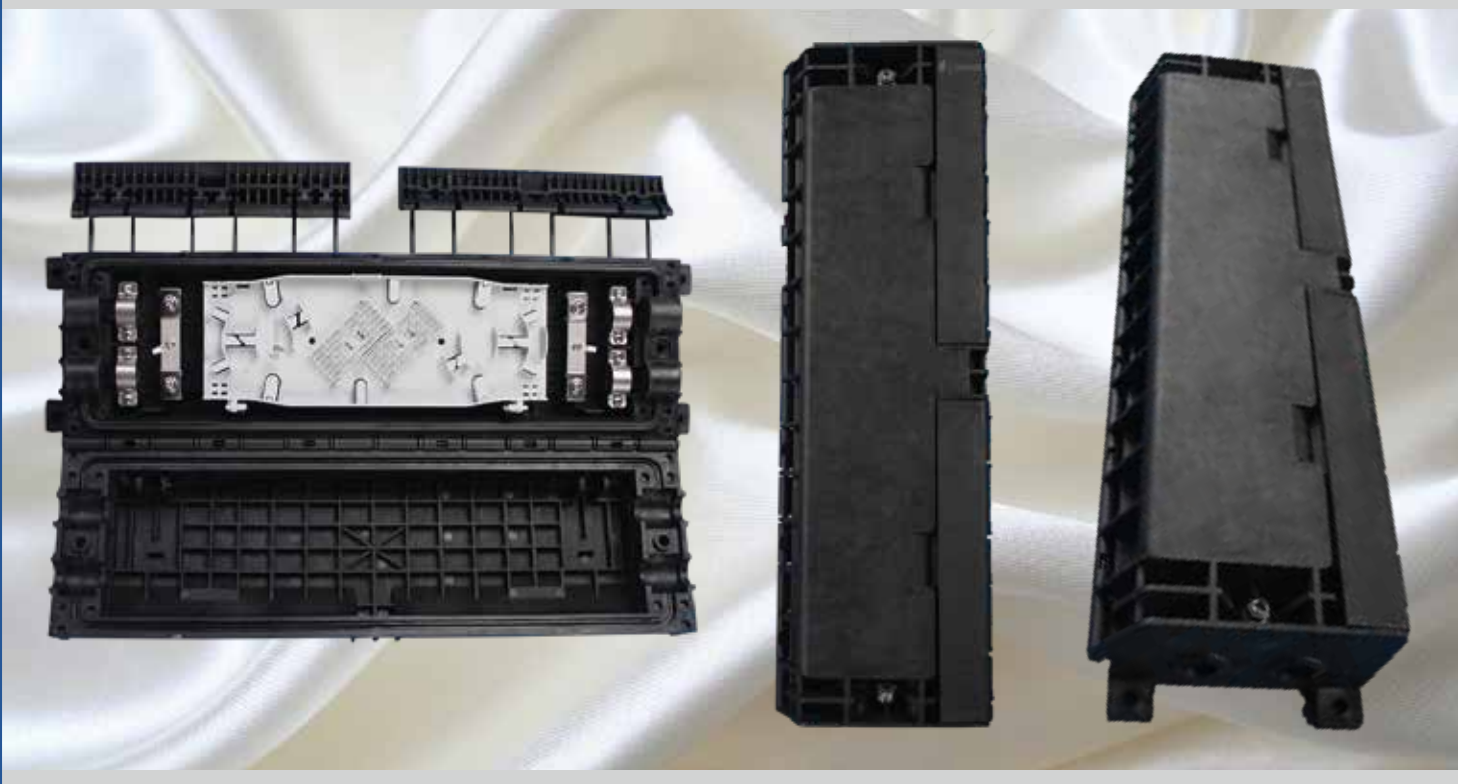

*\*Specifications are subject to change without notice based on technical recommendations and related product enhancements*

## Components

- Case, base, gasket seal, cable management & clamps
- Ground wire & splice try with heat deflated sleeves
- Insulation tape, buffer tube kit, cable tie & labels

## Optional accessories

- Duct & aerial mounting kits, relief valve & ground/earth system

## Specifications

Part number	Size(mm) L x W x H	Spliced fibre storage capacity	Cable ports	Max.diameter of cable(mm)	Protection Class	Splice trays
C.05.JC-L.131	420mm x 127mm x 72mm	Standard fibre 48 splices (2 x 24 splices)	4 ports	4 ports: each port for 1 cable with max 16 mm	IP 67	Max 4 trays(each tray for 12 or 24 splices)

## Applications

- Underground
- Aerial
- Wall mounting
- Duct Mounting

*\*Specifications are subject to change without notice based on technical recommendations and related product enhancements*