

## Fibre Optic Splice Closure



# DATA SHEET

**44** 44 20 8895 6455

**■ info@webbinfra.com** 

www.webbinfra.com




### Fibre Optic Inline Closure C.05.JC-L.132

Joint closures are a range of products primarily used for joining cables. Joints in cables are a practical reality with the increase in distances that data needs to be transmitted. The primary function of a fibre optic joint closure is to protect the fibre joints from any physical damage.

Webb joint closures are made of high corrosion resistant polycarbonate material with heavy duty IP 68 delivering synthetic gaskets for total ingress protection. Our production treatments make our units UV resistant and waterproof. Every cable entry has high quality cable sealing plugs to maintain IP 68 ratings.

#### **Features**

- Adequate for loading 1:8 PLC splitter
- Adequate for a maximum of 8SC adaptors
- Effortless access
- Requires only base level usage of tools during installation & re-entry
- Recyclable and suitable for re-entry
- Inclusive of the complete range of hardware

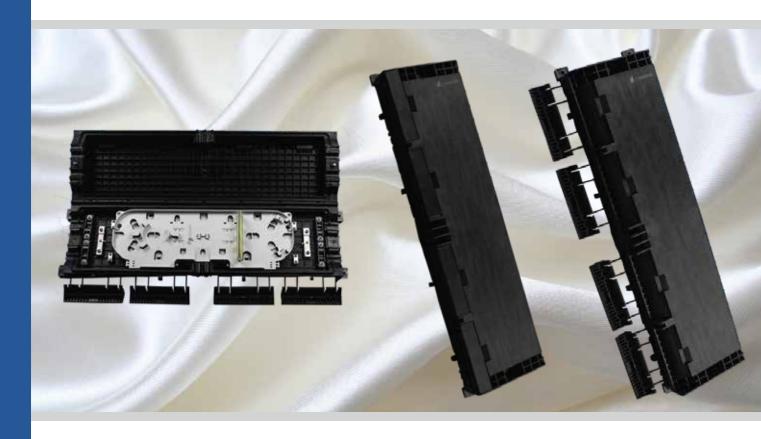

<sup>\*</sup>Specifications are subject to change without notice based on technical recommendations and related product enhancements



#### **Components**

- Case, base, gasket seal, cable management & clamps
- Ground wire & splice try with heat deflated sleeves
- Insulation tape, buffer tube kit, cable tie & labels

#### **Optional accessories**

Duct & aerial mounting kits, relief valve & ground/earth system

#### **Specifications**

Part number	Size(mm) L x W x H	Spliced fibre storage capacity	Cable ports	Max.diameter of cable(mm)	Adaptor	Splice trays
C.05.JC-L.132	643mm × 175 mm × 76mm	Standard fibre 48 splices	8 ports for main cable, 8 ports for drop cable	4 ports: each port for 1 cable with max 16 mm	Max. 8 SC adaptor	8 main cable ports: 4 large ports for 1 cable with max 16 mm, 4 large ports for 1 cable with max 8 mm 8 drop cable ports: for diameter 3mm or 3 x 2 drop cables

#### **Applications**

- Underground
- Wall mounting
- Aerial
- Duct Mounting

<sup>\*</sup>Specifications are subject to change without notice based on technical recommendations and related product enhancements