



Fibre Optic Splice Closure



DATA SHEET

☎ +44 20 8895 6455
✉ info@webbinfra.com
🌐 www.webbinfra.com


Fibre Optic Inline Closure C.05.JC-L.135

Joint closures are a range of products primarily used for joining cables. Joints in cables are a practical reality with the increase in distances that data needs to be transmitted. The primary function of a fibre optic joint closure is to protect the fibre joints from any physical damage.

Webb joint closures are made of high corrosion resistant polycarbonate material with heavy duty IP 68 delivering synthetic gaskets for total ingress protection. Our production treatments make our units UV resistant and waterproof. Every cable entry has high quality cable sealing plugs to maintain IP 68 ratings.

Features

- Adequate for loading 1:4 and 1:8 PLC splitter
- Adequate for a maximum of 8SC adaptors
- Effortless access
- Requires only base level usage of tools during installation & re-entry
- Recyclable and suitable for re-entry
- Inclusive of the complete range of hardware

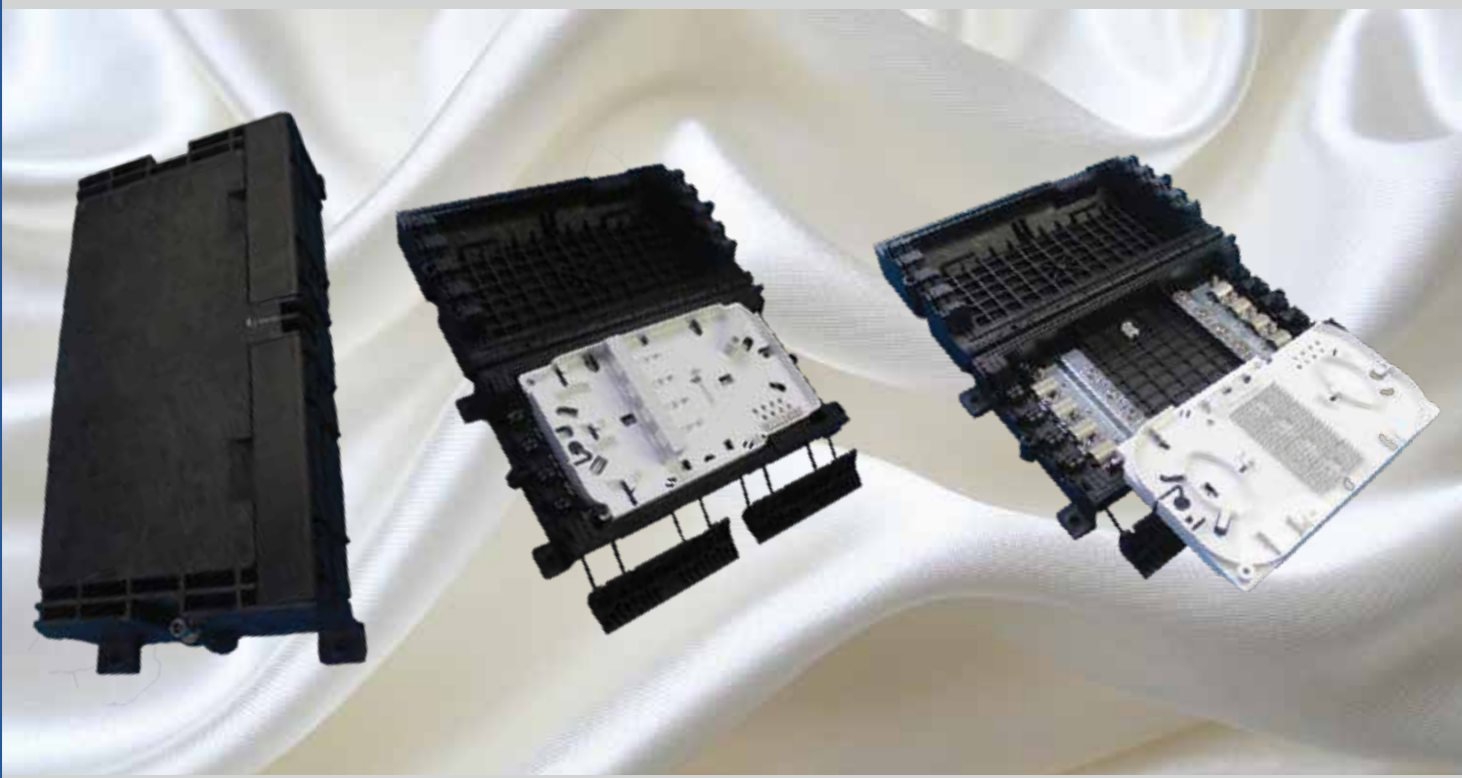

**Specifications are subject to change without notice based on technical recommendations and related product enhancements*

Components

- Case, base, gasket seal, cable management & clamps
- Ground wire & splice try with heat deflated sleeves
- Insulation tape, buffer tube kit, cable tie & labels

Optional accessories

- Duct & aerial mounting kits, relief valve & ground/earth system

Specifications

| Part number | Size(mm) L x W x H | Spliced fibre storage capacity | Cable ports | Adaptor | Max.diameter of cable(mm) |
|---------------|--------------------------|-----------------------------------|---|----------------------|---|
| C.05.JC-L.135 | 325mm × 173 mm × 86mm | Standard fibre 48 splices | 8 ports for main cable, 8 ports for drop cable | Max. 8 SC adaptor | 8 main cable ports: each for 1 cable with max 14mm. 8 drop cable ports: each for diameter 3mm or 3 x 2mm drop cables |

Applications

- Underground
- Aerial
- Wall mounting
- Duct mounting

**Specifications are subject to change without notice based on technical recommendations and related product enhancements*