




Fibre Optic Splice Closure

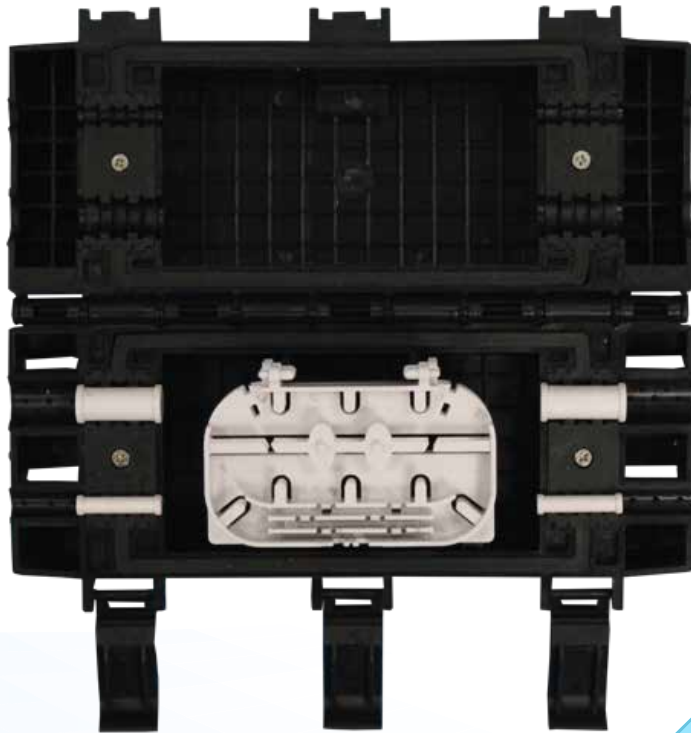


DATA SHEET

☎ +44 20 8895 6455
✉ info@webbinfra.com
🌐 www.webbinfra.com

Fibre Optic Inline Closure C.05.JC-L.F03

Joint closures are a range of products primarily used for joining cables. Joints in cables are a practical reality with the increase in distances that data needs to be transmitted. The primary function of a fibre optic joint closure is to protect the fibre joints from any physical damage.

Webb joint closures are made of high corrosion resistant polycarbonate material with heavy duty IP 55 delivering synthetic gaskets for total ingress protection. Our production treatments make our units UV resistant and waterproof. Every cable entry has high quality cable sealing plugs to maintain IP 55 ratings.

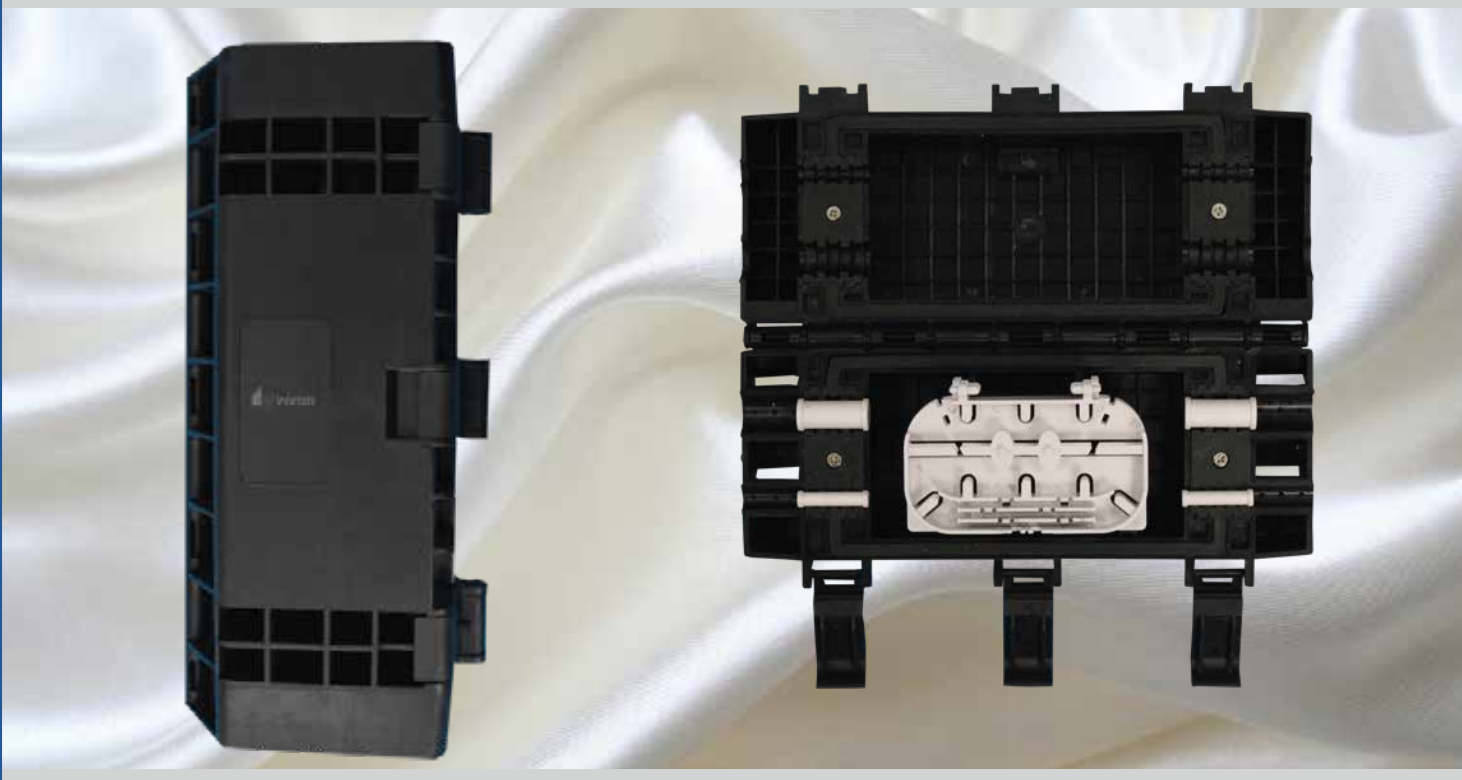

**Specifications are subject to change without notice based on technical recommendations and related product enhancements*

Features

- Compacted design suitable for FTTH application
- Corrugated closure and light-weight plastic delivers robustness and resistance to chemical and UV degradation
- Hinge based structure
- Inclusive of sheath conservation and central strength member fasten feature
- Requires only base level usage of tools during installation & re-entry
- Inclusive of the entire range of hardware
- RoHS compliance

Applications

- Aerial
- Wall mounting
- Duct

Specifications

Part number	Dimension(mm)	Cable ports	Adaptor Capacity	Protection Class
C.05.JC-L.F03	200 x 94 x 60	4 ports: 2 ports for main cable with 9.5 - 12mm, 2 ports for drop cable with 4 - 6mm.	12 splices (2 x 6 splices)	IP 55

**Specifications are subject to change without notice based on technical recommendations and related product enhancements*