




Fibre Optic Splice Closure

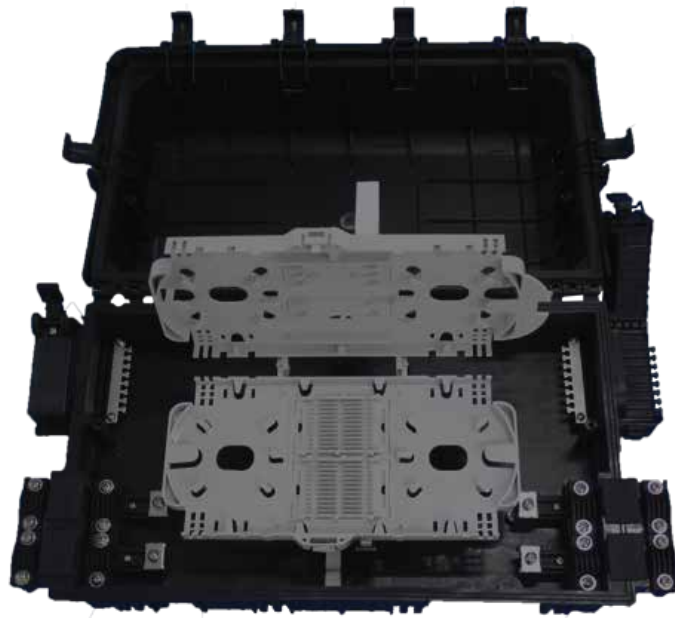


DATA SHEET

☎ +44 20 8895 6455
✉ info@webbinfra.com
🌐 www.webbinfra.com

Fibre Optic Inline Closure C.05.JC-L.TL16

Joint closures are a range of products primarily used for joining cables. Joints in cables are a practical reality with the increase in distances that data needs to be transmitted. The primary function of a fibre optic joint closure is to protect the fibre joints from any physical damage.

Webb joint closures are made of high corrosion resistant polycarbonate material with heavy duty IP 65 delivering synthetic gaskets for total ingress protection. Our production treatments make our units UV resistant and waterproof. Every cable entry has high quality cable sealing plugs to maintain IP 65 ratings.

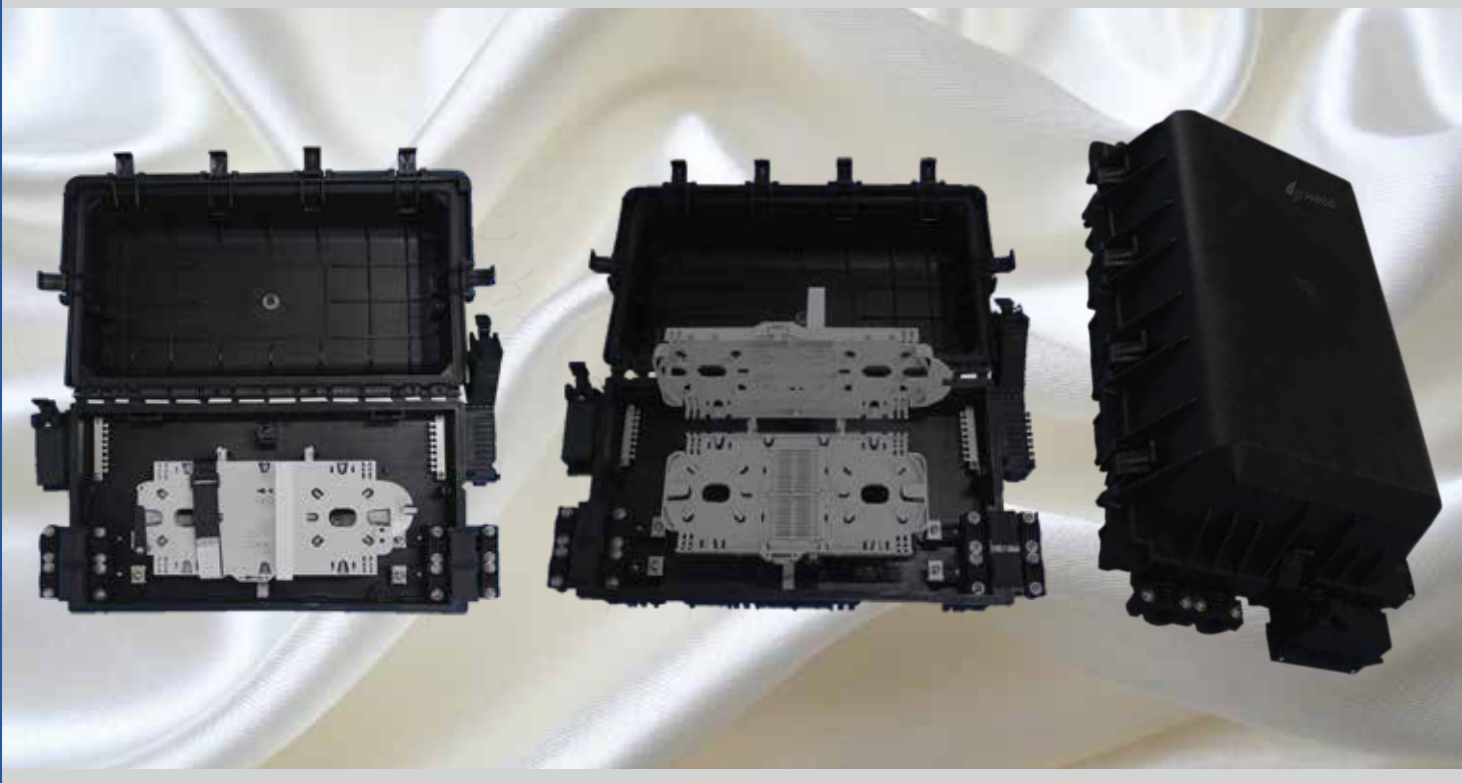

**Specifications are subject to change without notice based on technical recommendations and related product enhancements*

Features

- Can be utilized for notched, closed & rigid sheath platforms
- Suitable for the entire range of fibre optic cables
- Corrugated closure and light-weight plastic delivers robustness and resistance to chemical and UV degradation.
- Recyclable and suitable for re-entry
- Inclusive of sheath conservation and central strength member fasten feature
- Requires only base level usage of tools during installation & re-entry
- Inclusive of the entire range of hardware
- Protection category: IP65
- RoHS compliance

Applications

- Aerial
- Wall mounting
- Duct

Specifications

Part number	Size(mm) L x W x H	Spliced fibre storage capacity	Adaptor Capacity	Cable ports
C.05.JC-L.TL16	445 x 240 x 140mm	Standard fibre, 48 splices (2 x 24 splices)	16 SC simplex adaptors	4 main cable ports: each port for 1 cable with max 12mm. 16 drop cable ports: for dia 3mm or 3 x 2 drop cables.

**Specifications are subject to change without notice based on technical recommendations and related product enhancements*