




CAT6A F/UTP Cable

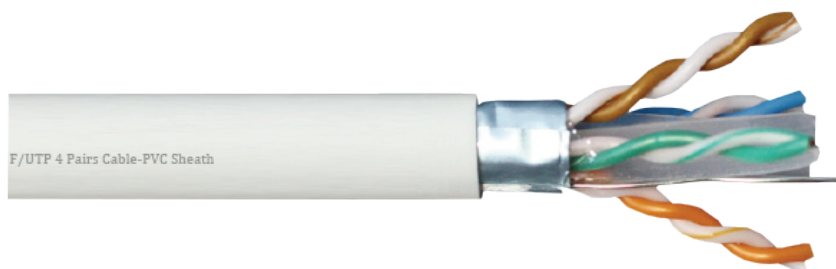

DATA SHEET

☎ +44 20 8895 6455
✉ info@webbinfra.com
🌐 www.webbinfra.com

CAT6A F/UTP 4 Pairs Cable


WEBB CAT6A F/UTP cable is 23 or 24 American wire gauge (AWG) ideally used for network and telecommunication applications. WEBB cables are cost effective, reliable provides high speed transmission performance.

Features

- Category: CAT6A F/UTP 4Pairs
- Reference standard: ISO/IEC11801, TIA-568-C.2
- Conductor: solid-bare copper material
- Screening material: Mylar+ AL/mylar
- Conductor thickness available in 23AWG or 24AWG
- Available in LSZH, PVC, PE sheaths
- Available in all standard colors
- Surface printing
 - Color: black or white
 - Print error & space: $\leq \pm 0.5\%/1m$
 - Letter height: $3.0 \pm 0.3mm$
- Core color
 - A. White- blue/blue
 - B. White-orange/orange
 - C. White-green/green
 - D. White- brown /brown
- Packing: wooden tray, dimension according to the requirement
- Packing length: $305 \pm 1.5m$
- Ripcord: yes
- Drain wire: yes
- Electrical Characteristics (20°C):
 - 1.0-250.0MHz impedance (Ω) 100 ± 15
 - 250.0-500.0MHz impedance (Ω) 100 ± 22
 - 1.0-250.0MHz delay skew (ns/100m) ≤ 45
 - Unbalanced-to-ground capacitance (pf/100m) max 330
 - DC resistance ($\Omega/100m$) max 9.38
 - DC conductor resistance unbalance (%) max 5.0

**Specifications are subject to change without notice based on technical recommendations and related product enhancements*

Inner Structure

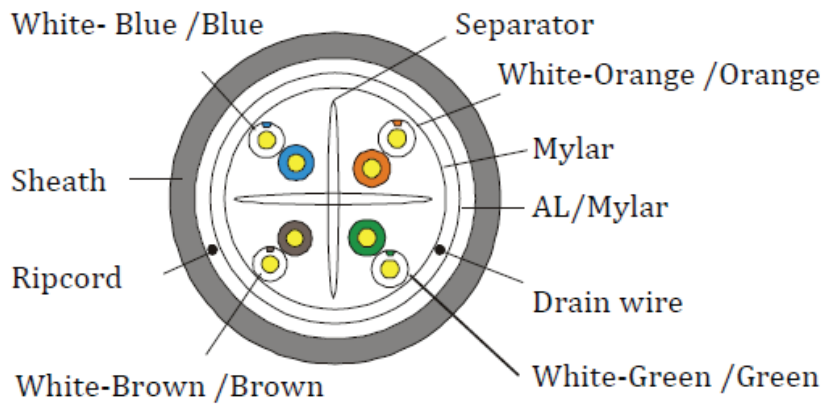

**Specifications are subject to change without notice based on technical recommendations and related product enhancements*



LAN CABLES PART NUMBER KEY

Part Number: C.04.CA._._._._._

C.04.Cable.Indoor/Outdoor.Cable Construction.Sheath.Color.Thickness

Please add the codes from the tables below in the above format to derive your desired product part number

Cable	Code
CAT6A	CA

Cable construction	Code
FTP / UFTP	FT

Indoor/outdoor	Code
Indoor	ND
Outdoor	OD

Sheath	Code
PVC	P
LZOH	L
Polyethylene	E

Color	Code
Grey	G
Black	B
Custom	Specify

Conductor thickness	Code
23AWG	23
24AWG	24

*Specifications are subject to change without notice based on technical recommendations and related product enhancements