




Duct Rod

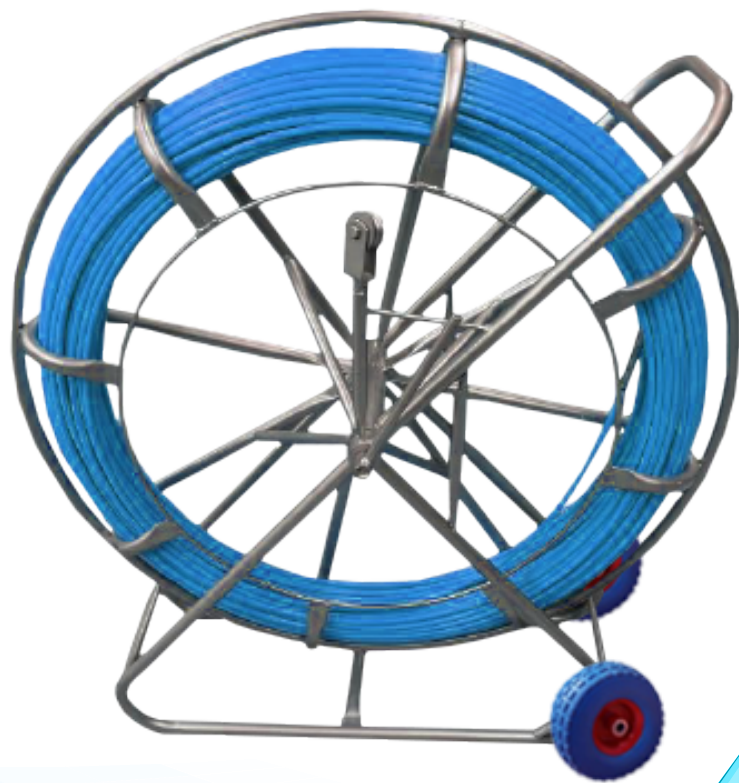

DATA SHEET

☎ +44 20 8895 6455
✉ info@webbinfra.com
🌐 www.webbinfra.com

Duct Rod

Duct Rods are used for reeling cables. The rod is made of E-glass fibre and high strength resin at high temperature, coated with high performance PP plastic. It consists of a protected layer that helps the duct rod cover slide into the surface. Duct rods are durable, corrosion resistant and also good insulation performance. Pull head and handcart helps the user to operate easily. FRP push pull rod will be fitted based on different reel size in accordance with the length of the rod.

Specification

- Portable, wheeled, traceable and fish tape types are available
- Rod diameter: 4.5mm, 6mm, 8mm, 9mm, 10mm, 11mm, 12mm, 13mm, 14mm, 16mm
- Rod length: 10m, 50m, 100m, 150m, 200m, 250m, 300m, 350m, 400m, 450m, 500m or custom made
- Inner material: E-glass fibre
- Outer jacket: PP plastic
- Bending radius: 7mm to 30mm
- Jacket color: Blue
- Cage material: Galvanized solid round steel with high quality flexible rods
- Cage size: 52 x 19 x 65cm, 70 x 20 x 80cm, 90 x 45 x 95cm, 120 x 45 x 110cm, 120 x 45 x 125cm, 130 x 50 x 130cm or custom-made
- Cage color: Silver, black or custom-made
- Surface: Spray finish
- Wheel type: Available in standard tyre or foam tyre
- Working temperature: -20°C to +60°C

**Specifications are subject to change without notice based on technical recommendations and related product enhancements*

DUCT ROD PART NUMBER KEY

Part Number: C.10.CRV.____

C.10.CRV.Rod diameter Rod length

Please add the codes from the tables below in the above format to derive at your desired product part number

Rod length(m)	Code
10	1
50	5
100	10
150	15
200	20
250	25
300	30
350	35
400	40
450	45
500	50

Rod diameter(mm)	Code
4.5	4.5
6	6
8	8
9	9
10	10
11	11
12	12
13	13
14	14
16	16

**Specifications are subject to change without notice based on technical recommendations and related product enhancements*