



Shuttered Adapters



DATA SHEET

☎ +44 20 8895 6455
✉ info@webbinfra.com
🌐 www.webbinfra.com

Shuttered Adapters


Webb shuttered adapter contains a plastic shutter which closes automatically when the connector is not installed. These shutter displays a warning label to indicate laser risk.

Features

- SC, LC, ST and FC & more adapters available
- Simplex/duplex
- Contains a built-in shutter to protect against the dust
- Available in different colours
- The shell is made of high-quality metal or plastic
- With & without shutters/flanges
- High reliability & stability

Applications

- Telecommunication network
- Data communication network
- CATV system
- Widely used in FTTH access network

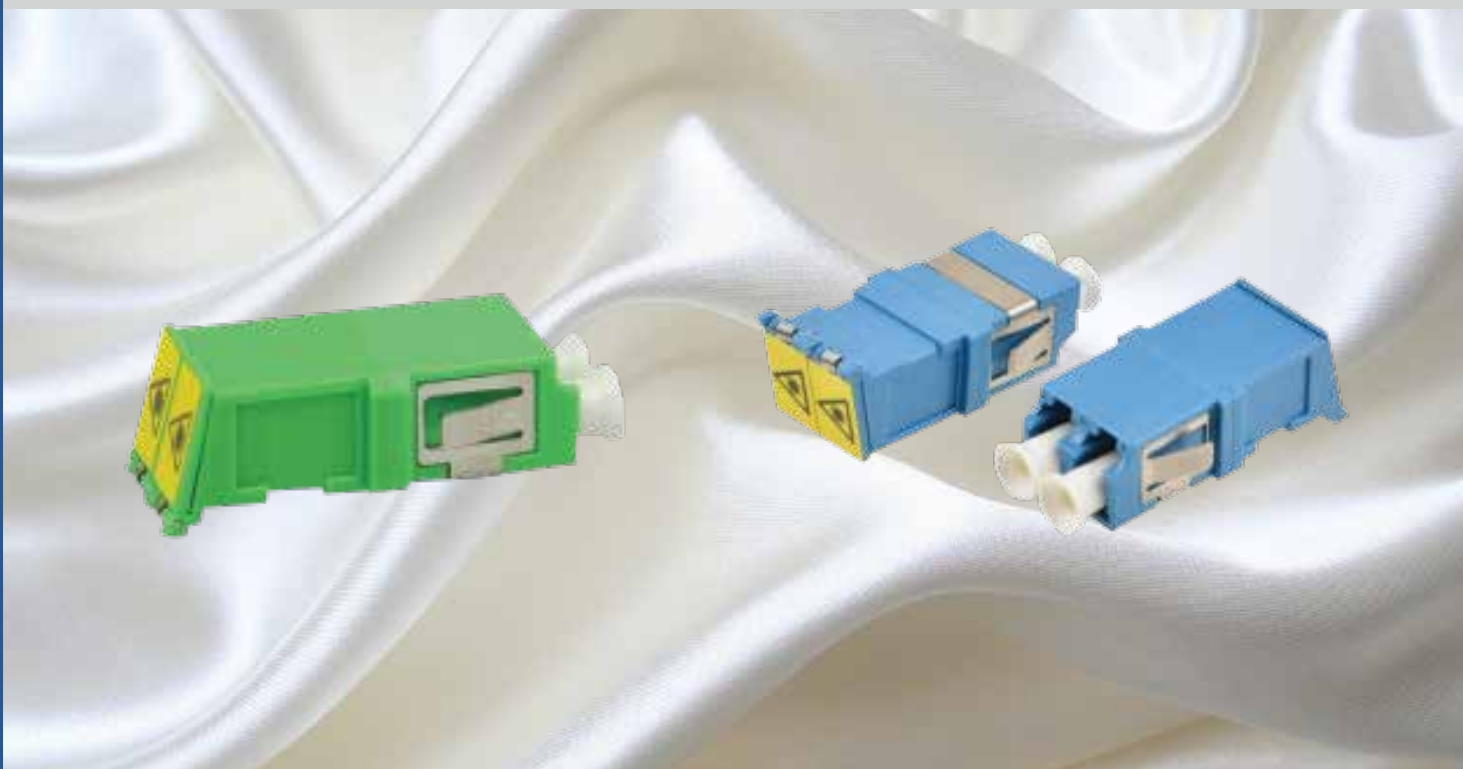

**Specifications are subject to change without notice based on technical recommendations and related product enhancements*



Technical Specifications

Specification	Female to Female	Male to Female
Mating durability	UPC/APC	UPC/APC
Insertion loss(dB)	OS2 9/125µm	OS2 9/125µm
Return loss(dB)	LSZH	LSZH
Operating temperature (°C)	Aramid	Aramid
Storage temperature (°C)	1000	1000

**Specifications are subject to change without notice based on technical recommendations and related product enhancements*